# **CONTACT**

GRAVEMEIER GmbH Enschedestraße 14 48529 Nordhorn -Germany-

T: +49 (0) 5921 – 879 175 F: +49 (0) 5921 – 879 150 eMail: info@gravemeier.info




# AUSTREE G HOW IT'S MADE?







## **ALUDECK** CESSORIES

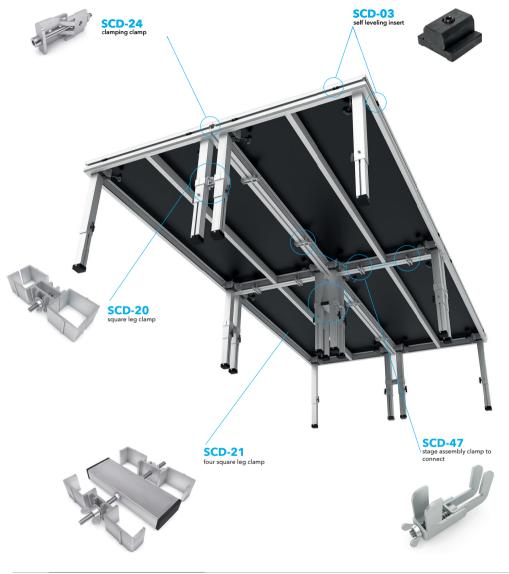











SCD-59 skirting profile for stage deck

# ALUDECK TYPES OF LEGS















**RLT** round telescopic legs h) 450 - 1900 mm

round legs h) 200 - 1400 mm








TLE

square telescopic legs h) 200 - 1400 mm





fixed legs with wheels h) 300 - 1000 mm

Insert corner fits to every type of leg whilst maintaining full stability.

square fixed legs


h) 200 - 1400 mm



Round Leg 48,3 mm







Square Leg 50x50 mm

Square Leg 60x60 mm



## **NEW ALUDECK** LIGHT

Its weight is only **32,45 kg**. Cross beam and special construction of the profile ensures full stability. Highest quality confirmed with TUV certificate guarantees safety of use. **Aludeck Light** is not only more durable, but also fully compatible with **Aludeck HD**.











Reinforced beam

Black Hexa plywcod

Max load of the stage deck

Weight 32,45 kg



## **CERTYFICATES ALUDECK** LIGHT













# TECHNOLOGICAL SOLUTIONS

Its weight is only **32,45 kg**. Cross beam and special construction of the profile ensures full stability. Highest quality confirmed with TUV certificate guarantees safety of use. **Aludeck Light** is not only more durable, but also fully compatible with **Aludeck HD**.











# DIMENSIONS OF PLATFORMS

## ALUDECK TYPES OF TOP

ALUDECK SHAPE	PRODUCT CODE	DIMMENSION	WEIGHT
	SCA11 2x1 m	2000 x1000 mm	32,45 kg
	SCA11 2x0,5 m	2000 x 500 mm	19,33 kg
	SCA11 1x1m	1000 x1000 mm	19,60 kg
	SCA11 1x0,5m	1000 x500 mm	12,15 kg
	SCA11.20 1x1 m	1000 x1000 mm	11,50 kg
	SCA11.20 2x1m R	2000 x1000 mm	18,60 kg
	SCA11.20 2x1 L	2000 x1000 mm	18,60 kg
	SCA11.22 FI2	1000 x1000 mm	14,90 kg
	SCA11.23 L/R	2000 x 1000 mm	32,85 kg





BLACK HEXA PLYWOOD height 12 mm



NATURAL WOOD PLYWOOD height 12 mm



BLACK CARPET height 12 mm



TRANSPARENT PLEXI GLASS height 12 mm



WHITE PLEXI GLASS height 12 mm



## **WHAT** DISTINGUISHES US

Safety of the product guaranteed by **TUV** and **DIN**. Availability of standard metrical and imperial dimensions. Stage decks are based on light and specially designed aluminum profile, which clenches the plywood into desired shape. All accessories (self-leveling inserts, clamps, grips, mounting inserts for curtains or banners) are safe and ensure easy configuration.





## **JOINING GLUE**

High quality polyurethane glue Layer of special sealing foam provides 100% connection between the profile and plywood.



**SEALING** FOAM


provides tight profile-plywood connection.



## BIRCH PLYWOOD

Highest quality of waterproof and durable birch plywood with 12 mm thickness is confirmed with certificate.

# TECHNOLOGICAL SOLUTIONS



#### **LEG** BRACKET

Additional bracket improves safety and stability of the stage deck.



### SINGLE STRENGTHENING **CROSS BEAM**

One cross beam and special construction of the profile ensure full stability.



#### REINFORCED

Additional element used in the inner part of the profile strenghthens the product and increases its life cycle.



## **NEW UNIWERSAL**

Allows mounting both round and square legs 50x50mm and 60x60mm without changing the insert corner.